

# EFFECT OF EXPOSURE FROM RADIO FREQUENCY (RF) FIELD OF GLOBAL SYSTEM FOR MOBILE COMMUNICATION (GSM) FROM BASE STATION (BS)

Shalangwa, D.A. & Singh, S.K.

Department of Pure & Applied Physics, Adamawa State University, Mubi, Nigeria.

## Abstract:

The desire in this work is to make an attempt to answer the several questions posed on the safety level of the RF radiated from GSM Base Stations (BSs). In Nigerian some people believed that exposure to radiation from BSs for long period could cause different diseases like cancer, destroys reproductive organs, congenital anomalies, epilepsy and persistent headache and some of the BSs were installed near the home of residence. Power densities were measured in every 10s at 100cm and 200cm away from GSM BSs installed at Lokuwa/Barama ward Mubi Nigeria few centimeters from home of residence with the view to establish whether exposure to RF would have relationship with Human health. Average amount of power density measured at 100cm were  $1.48\mu\text{W}/\text{cm}^2$ ,  $1.32\mu\text{W}/\text{cm}^2$ ,  $1.50\mu\text{W}/\text{cm}^2$ , at 200cm were  $1.8\mu\text{W}/\text{cm}^2$ ,  $1.87\mu\text{W}/\text{cm}^2$  and  $2.26\mu\text{W}/\text{cm}^2$  with corresponding values of specific absorption rate (SAR) as 0.005, 0.0007, 0.0005, 0.008, 0.006 and  $0.0007\text{Kg}/\text{cm}^2$  for the major GSM Operators in Mubi that is ZAIN, MTN and GLOBALCOM respectively. The analysis shows that the SAR fall far below recommended level when compared with the general public safety guide line for limiting radiation exposure and SAR given by the world health Organization (WHO) and international Commission on non ionizing radiation protection (ICNIRP).

**Key words:** safety level, exposure, radio frequency, human health, base stations, residence and health risk .

## Introduction

Due to the rise of wireless technology in Nigeria from 2001 to date, there have been several questions posed on the safety of the RF radiated from the GSM BSs in Mubi Nigeria and all over the world, In Nigeria today the health risk of the RF of GSM BSs has becomes an area of great concern since radiation from BSs use electromagnetic radiation in the microwave range as shown in Figure 1 and many people believed till date that exposure to RF may be harmful to the health of the Human being. According to the Lennart, et al (2007), long term exposure or used of cellular phone for greater or equal to 10 years gives a consistent pattern of increased risk for acoustic neuroma and glioma, the risk is highest for ipsilateral exposure. Some research also highlighted much on the effects of RF on Human Brain;

Radiation from 1800MHz could cause oxidative damage to the mitochondrial DNA in primary cultured neurons, oxidative damage to mitochondrial DNA may account for the neurotoxicity of RF radiation in the brain (Shangcheng et al, 2009), exposure from RF is highly significant for neuronal damage in the cortex, hippocampus and basal ganglia in the brain of exposed rats (Lief et al, 2003) and also expose of EA.hy926 cells to RF changes the phosphorylation status of numerous (Dariusz et al, 2002) some research in other areas also stated that there is risk of RF radiation to pregnant women; a pregnant woman and the foetus both are vulnerable because of the fact that these RF radiation continuously react with the developing embryo, increasing cells, because of the thermal radiation also when

the pregnant women either use Mobile phone or when illuminated with RF radiation, the developing child can become affected, the developmental malformation may occur. (Loque et al, 2004, Thomas, 2007 & Persson, 1997) and also according to Hyland (2000) exposure to RF have effect on two areas of the body like eyes and testes, are particularly vulnerable to RF heating because of the relative lack of available blood flow to dissipate the excessive heat load.

Although some group like the International Commission on non ionizing radiation protection (ICNIRP) and mobile manufacturer forum (MMF) that manufactures mobile equipments and GSM operators across the world insists that radiation from base station has no discernible effects on human health.

Therefore to confirm these positions whether there is scientific evidence or not to suggest that the low power emission levels are inimical to human or animal health; this now prompted the demand for this work.

Secondly the study was carried out to asses the RF exposure level from GSM BSs at unguwar Lokuwa/Barama ward Mubi Nigeria and its effects on Human health. There are others GSM BSs installed in Mubi town at different locations but this area was chosen because of the population density around the area, accessibilities of the area by general public especially students from Adamawa State University, Federal polytechnic and College of Health, also student hostel are located there and some students spend most of their time within the area.

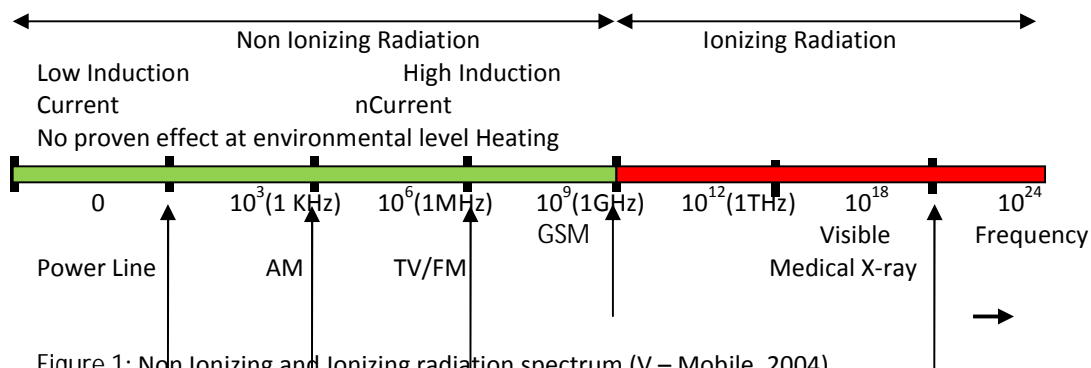


Figure 1: Non Ionizing and Ionizing radiation spectrum (V – Mobile, 2004)

### Material and Methods

The materials used in this research are stop watch, measuring tape, electromagnetic meter and BSs

### Method of Data Collection

The data (power density) were collected from the major three (3) GSM operator BSs in Nigeria; all the BSs were located at Unguwar Lokowa/Barama Mubi North Adamawa State of Nigeria. For each of these BSs the measurements were taken at 100cm and 200cm in every 10 minute for an hour in front, back and sides of the BSs. All the BSs

are dual band antennas; the antennas have inbuilt features which enable them radiate at 900/1800MHz. the antenna are sectored 120<sup>0</sup> and the antenna were installed at the height of 30m, 30m and 35m above the sea level for ZAIN, MTN and GLOBACOM respectively the electromagnetic meter was place at approximately 1.5m to detect the power density at a given point, the electromagnetic detector was made mobile which permit us to take reading at the desired point while the BSs are fixed. The summary of the standard parameters for BSs installed in Mubi town are shown in Table 1

**Table 1:** Summary of the standard parameters for BSs installed in Mubi town

Parameter	Standard conditions
Transmitter Power (dBm)	45
Height of the Base Stations (m)	30 30 35
Height of the power density detector (m)	1.5
Reference distances (cm)	100 200
Carrier Frequency (MHz)	900/1800

**Method of Data Analysis**

The power density measured is express as

$$P_D = \frac{E^2}{Z_0} \quad (1)$$

Where E is the electric field,  $Z_0$  is the free space impedance equivalent to  $120\pi$  or  $377\Omega$ . The electric field assumed all the components of the electric field in x, y, z plane which may be further express as

$$E^2 = E_x^2 + E_y^2 + E_z^2 \quad (2)$$

to determine the SAR we have to know the values of the electric field, from equation (1), we have

$$E^2 = 3777P_D \quad (3)$$

then the SAR is usually define in terms of electric field or in respect to change in temperature given by

$$SAR = \sigma \frac{E^2}{\rho} = c \frac{dT}{dt} \Big|_{t \rightarrow 0} \quad (4)$$

neglecting the temperature effects and the specific heat capacity (c), then the required SAR becomes

$$SAR = \sigma \frac{E^2}{\rho} \quad (5)$$

where  $\sigma$  is the conductivity measured in ( $\Omega^{-1}m^{-1}$ ) and  $\rho$  is the mass density in ( $Kgm^{-3}$ ), substituting equation (3) into (5) it yield

$$SAR = \frac{3777P_D}{\rho} \quad (6)$$

Equation (6) defines average the SAR of the whole body and SAR of localized part of the body (head).

While Table 2 and 3 give the summary of the Human brain tissue dielectric parameter and the ICNIPR's general public safety guide lines for limiting radiation exposure and SAR

**Table 2:** Summary of the Human brain tissue dielectric parameter

Frequency (MHz)	Conductivity ( $\Omega^{-1}m^{-1}$ )	Mass density ( $Kgm^{-1}$ )
900	0.7665	1030
1800	1.1531	1030

**Table 3:** Summary of the ICNIPR's general public safety guide lines for limiting radiation exposure and SAR.

Frequency (MHz)	Power Density ( $wm^{-1}$ )	Whole body (Average SAR)	Localized SAR (head)
900	4.50	0.08	2.00
1800	9.00	0.08	2.00

## Results

All the power densities measured from each GSM BSs at 100cm and 200cm are presented in Table 4 –9 as follows

**Table 4: Radiation from GLO masts at 100cm**

Y(min)	X <sub>1</sub>	X <sub>2</sub>	X <sub>3</sub>	X <sub>4</sub>	X
10	0.45	0.41	0.30	0.27	0.36
20	0.40	0.40	0.25	0.21	0.32
30	0.21	0.40	0.20	0.21	0.26
40	0.40	0.45	0.40	0.20	0.26
50	0.45	0.40	0.40	0.20	0.36
60	0.40	0.30	0.30	0.25	0.31
3.5h	2.31 $\mu\text{W}/\text{cm}^2$	2.36 $\mu\text{W}/\text{cm}^2$	1.87 $\mu\text{W}/\text{cm}^2$	1.34 $\mu\text{W}/\text{cm}^2$	1.87 $\mu\text{W}/\text{cm}^2$

(Field Survey, 2009)

Y = Time taken during the measurement in minutes

X<sub>1</sub> = Amount of radiation measured in front of the Antenna

X<sub>2</sub> = Amount of radiation measured at the back of the Antenna

X<sub>3</sub> = Amount of radiation measured at side 1 of the Antenna

X<sub>4</sub> = Amount of radiation measured at side 2 of the Antenna.

X = Average amount of radiation measured across the all sides of the Antenna.

**Table 5: Radiation from GLO masts at 200cm**

Y (min)	X <sub>1</sub>	X <sub>2</sub>	X <sub>3</sub>	X <sub>4</sub>	X
10	0.25	0.20	0.20	0.40	0.26
20	0.20	0.10	0.20	0.20	0.18
30	0.20	0.10	0.30	0.32	0.23
40	0.40	0.20	0.31	0.31	0.31
50	0.30	0.40	0.32	0.27	0.32
60	0.20	0.10	0.21	0.28	0.20
3.5h	1.55 $\mu\text{W}/\text{cm}^2$	1.10 $\mu\text{W}/\text{cm}^2$	1.51 $\mu\text{W}/\text{cm}^2$	1.78 $\mu\text{W}/\text{cm}^2$	1.50 $\mu\text{W}/\text{cm}^2$

(Field Survey, 2009)

**Table 6: Radiation from MTN masts at 200cm**

Y (min)	X <sub>1</sub>	X <sub>2</sub>	X <sub>3</sub>	X <sub>4</sub>	X
10	0.60	0.40	0.40	0.40	0.45
20	0.20	0.40	0.30	0.40	0.33
30	0.40	0.30	0.30	0.30	0.33
40	0.50	0.35	0.40	0.20	0.36
50	0.40	0.30	0.30	0.60	0.40
60	0.45	0.30	0.40	0.40	0.39
3.5h	2.55 $\mu\text{W}/\text{cm}^2$	2.05 $\mu\text{W}/\text{cm}^2$	2.10 $\mu\text{W}/\text{cm}^2$	2.30 $\mu\text{W}/\text{cm}^2$	2.26 $\mu\text{W}/\text{cm}^2$

(Field Survey, 2009)

**Table 7: Radiation from MTN masts at 100cm**

Y (min)	X <sub>1</sub>	X <sub>2</sub>	X <sub>3</sub>	X <sub>4</sub>	X
10	0.25	0.19	0.19	0.20	0.21
20	0.21	0.25	0.25	0.30	0.25
30	0.30	0.25	0.25	0.20	0.25
40	0.30	0.15	0.20	0.20	0.21
50	0.27	0.10	0.19	0.21	0.19
60	0.25	0.15	0.18	0.24	0.21
3.5h	1.60 $\mu\text{W}/\text{cm}^2$	1.09 $\mu\text{W}/\text{cm}^2$	1.26 $\mu\text{W}/\text{cm}^2$	1.35 $\mu\text{W}/\text{cm}^2$	1.32 $\mu\text{W}/\text{cm}^2$

(Field Survey, 2009)

**Table 8: Radiation from ZAIN masts at 200cm**

Y (min)	X <sub>1</sub>	X <sub>2</sub>	X <sub>3</sub>	X <sub>4</sub>	X
10	0.20	0.20	0.20	0.40	0.25
20	0.30	0.30	0.20	0.20	0.28
30	0.40	0.20	0.20	0.30	0.28
40	0.40	0.30	0.40	0.38	0.35
50	0.50	0.30	0.40	0.38	0.38
60	0.40	0.20	0.40	0.32	0.33
3.5h	2.20 $\mu\text{W}/\text{cm}^2$	1.50 $\mu\text{W}/\text{cm}^2$	1.80 $\mu\text{W}/\text{cm}^2$	2.00 $\mu\text{W}/\text{cm}^2$	1.87 $\mu\text{W}/\text{cm}^2$

(Field Survey, 2009)

**Table 9: Radiation from ZAIN masts at 100cm**

Y (min)	X <sub>1</sub>	X <sub>2</sub>	X <sub>3</sub>	X <sub>4</sub>	X
10	0.25	0.11	0.20	0.26	0.21
20	0.27	0.20	0.25	0.21	0.23
30	0.25	0.25	0.30	0.20	0.25
40	0.20	0.20	0.25	0.22	0.22
50	0.49	0.20	0.30	0.22	0.30
60	0.30	0.25	0.28	0.25	0.27
3.5h	1.76 $\mu\text{W}/\text{cm}^2$	1.21 $\mu\text{W}/\text{cm}^2$	1.58 $\mu\text{W}/\text{cm}^2$	1.36 $\mu\text{W}/\text{cm}^2$	1.48 $\mu\text{W}/\text{cm}^2$

(Field Survey, 2009)

### Discussion

The average values of the power density and the SAR are given in Table 10

**Table 10: Summary of average values of the power density and the SAR measured**

GSM Operators	ZAIN		MTN		GLOBACOM	
Distance (cm)	100	200	100	200	100	200
X ( $\mu\text{W}/\text{cm}^2$ )	1.48	1.87	1.32	2.26	1.50	1.87
SAR (Kg/cm <sup>2</sup> )	0.005	0.007	0.005	0.008	0.006	0.007

Point – to – Point microwaves antenna transmit and receive microwave signals across relatively short distance from a few tenth of kilometers to 48Km or more (Kelly, 2005). These antennas are usually circular in shape and are normally found mounted on a supporting tower, they are always place at a considerable height say from 30 – 200m to provide clear and unobstructed line of sight (LOS) path between both ends of a transmission path or link. These antennas have a variety of uses, such as transmitting voice and data message and serving as link between broadcast or cable TV studios and transmitting antennas. The RF signal from these antennas travel in a directed beam from

a transmitting antenna to a receiving antenna, and dispersion of microwave energy outside of the relatively narrow beam is minimal and this antenna transmit usually very low power levels, usually on the order of a few watts or less. The measurement were taken at 1.5m above the sea level and the average amounts of power densities measured in this study were 1.48 $\mu\text{W}/\text{cm}^2$ , 1.32 $\mu\text{W}/\text{cm}^2$ , 1.50 $\mu\text{W}/\text{cm}^2$ , at 200cm were 1.8 $\mu\text{W}/\text{cm}^2$ , 1.87 $\mu\text{W}/\text{cm}^2$  and 2.26 $\mu\text{W}/\text{cm}^2$  for the major GSM Operators in Mubi that is ZAIN, MTN and GLOBALCOM respectively. These measurements show that ground level power densities due to microwave directional antenna are far less than the minimum

recommended safety level which is in the range of 4.5 to 10.5W/m (Aiman, 2010) while the SAR obtained were compared with the ICNIPR's general public safety guide lines for limiting radiation exposure and SAR and was also found to be far below the minimum recommended level (ICNIPR, 2010). Moreover as added margin of safety, microwave towers are in accessible to the general public because of its considerable height. Significant exposure from these antennas could only occur in the unlikely

event that an individual has to stand directly in front of the antenna and very close to the antenna for a long period of time.

Since the power density measured was taken in four directions that is in the front, back and two sides of the GSM BSs the enclosed area is about 10,000cm<sup>2</sup> and 40,000cm<sup>2</sup> for the reference distances 100cm and 200cm respectively shows that the smaller the area the higher the power density detected and vice – versa as depicted in Figure 2

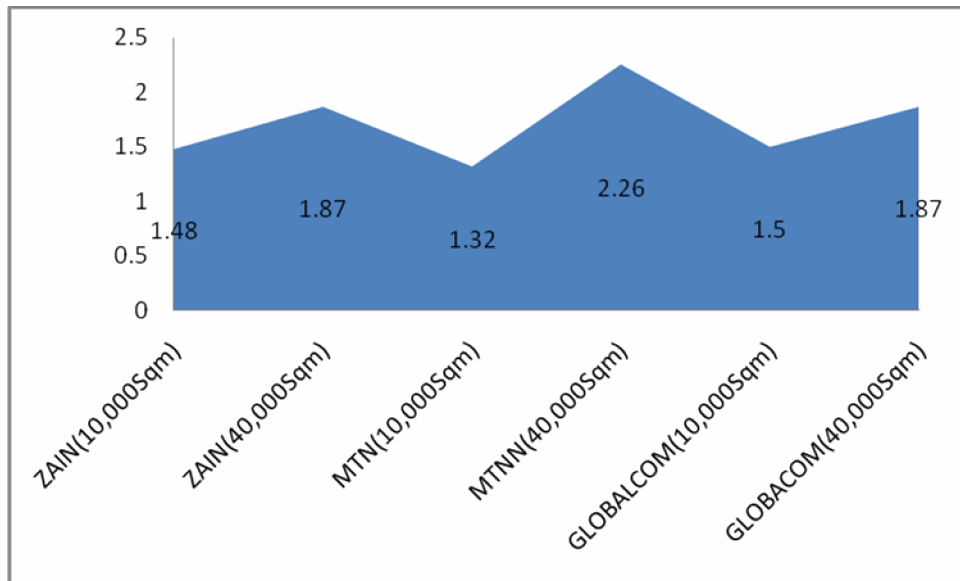


Figure 2: Power density in enclosed area

At 100cm the power density measured for GLOBALCOM was the highest (1.50μW/cm<sup>2</sup>) followed by that of ZAIN (1.48μW/cm<sup>2</sup>) then MTN is lowest (1.32μW/cm<sup>2</sup>) while at 200cm MTN is the highest (2.26μW/cm<sup>2</sup>) in this case GLOBACOM and ZAIN have the same power density (1.87μW/cm<sup>2</sup>) as shown in Figure 3.

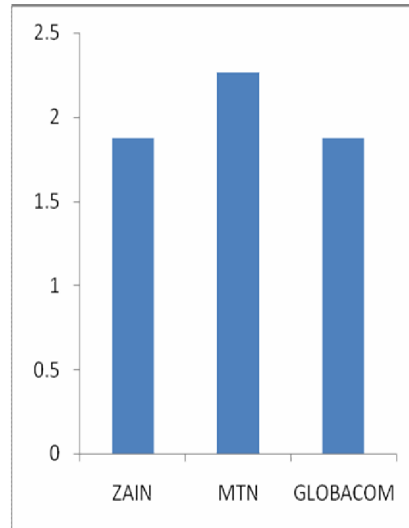
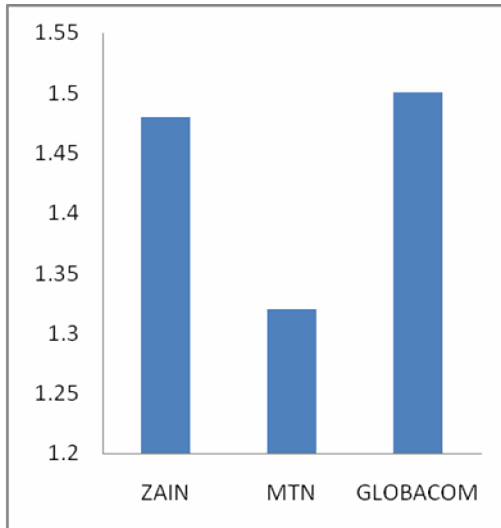


Figure 3(a): Average power density at 100cm

Figure 3(b): Average power density at 200cm

Figure 4 present combined average power density at 100cm and 200cm; MTN is the highest ( $3.58\mu\text{W}/\text{cm}^2$ ) followed by GLOBACOM ( $3.37\mu\text{W}/\text{cm}^2$ ) and ZAIN ( $3.35\mu\text{W}/\text{cm}^2$ ) is the least.

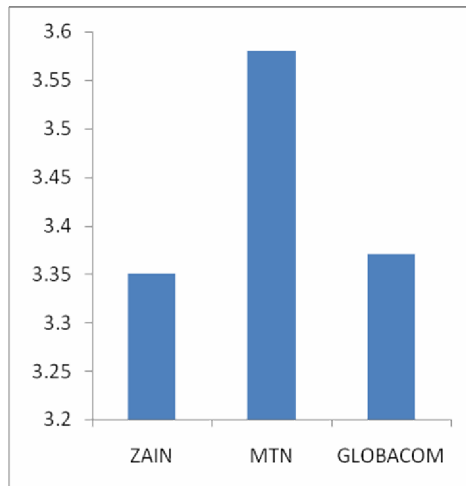


Figure 4: Combine Average power density at 100cm and 200cm

Finally the measurements were carried out to asses the RF radiation level from the three major GSM BSs at unguwar Lukuwa/Barama in Mubi town Nigeria, the power density and SAR were compared with that of WHO and ICNIRP guides; the results show that all power densities and SAR are far below the recommended safety guide lines.

## Conclusion

The purpose of this research is to study the amount of RF radiation in the Residential areas at Lokuwa/Bamara ward with view to establishing that exposure from RF would have discernable effect on Human health. The results obtained from this work were compared with that of WHO and ICNIRP safety guide lines and was found to be far below recommended level. However this

research does not take into consideration the Laboratory experimental effects on any part of the human body. I believed that this work has made attempt to answer some of the several questions posed on the safety level of the RF radiated from GSM BSs in Lokuwa/Barama ward in Mubi town of Nigeria.

## References

- Aiman, I. and Narashidah, M.D. (2010). Mobile phone base stations radiation study for addressing public concern. *American journal of engineering and applied sciences* 3(1): 117 - 120
- Dariusz, L., Sakari, J., Jukka, R. and Reetta, K. (2002). Non thermal activation of the hsp27/p38 MAPK stress pathway by mobile phone radiation in Human endothelial cells, molecular mechanism for cancer and blood barrier related effects, Blackwell verlay publishers 70:120 – 129
- ICNIRP (2009). Summary of the ICNIPR's general public safety guide lines for limiting radiation exposure and SAR. Available on <http://www.ICNIRP.com>
- Kelly, C. (2005). Radio frequency (RF) radiation. *Health Physics Society (HPS)*: 1 -10
- Leif, S., Arne, E., Jacob, L. E., Lars, M., Bertil, R. and Persson, R. (2003). Nerve cell damage in mammalian brain after exposure to microwave phone. *Journal of Environmental health perspectives* 111(7): 881 - 883
- Lennart, H., Michael, C., Fredrick, S., Kjell, H. M. and Morgan, L. (2007). Long – term use of cellular mobile phone and brain tumor; increased risk associated with use greater or equal to 10 years. *Journal of Occupational Environmental Med.*
- Loque, J. N., Hamburger, S., Silverman P. M, Chiachierini R. P (2004). Congenital anomalies and paternal occupational exposure to short wave, microwave, infrared and acoustic radiation. *Journal of environmental health prospective* 112(17): 1733 - 1801
- Persson, B. R. R. (1997). Blood brain barrier permeability in rats exposed to electromagnetic fields used in wireless communication and wireless network. *Kluwer Academic Publishers Hingham MA USA*: 455 - 461
- Shangcheng Xu, Z., Leizhang, Z., Weizhang, Y., Xubu, W., Maoquan, L., Chunbai, C., Mindi, H., Guangbin, Z and Zhengping, Y. (2009). Exposure to 1800MHz radio frequency radiation induces oxidative damage to mitochondrial DNA in primary cultured neutrons. *Science direct* 10(4): 1 -8
- Thomas, H., Uwe, M., and Peter, S. (2002). Non stop pulsed radiation inside home. *2<sup>nd</sup> International workshop on Biological effects of electromagnetic fields*: 775 – 780
- V-Mobile (2004). Yearly magazine of events: 34 - 36